


Dish-O-Matic Band Saw ///Stretcher Roll

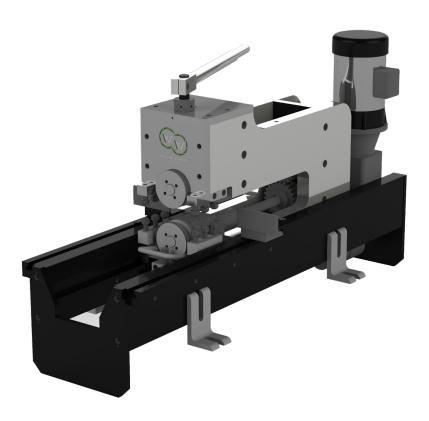

The Williams & White Disho-Matic Band Saw Stretcher
ultimate Stretcher roll effortlessly
tensions and level band saws
with the one machine. Saving
time and space in the shop floor.

Highlights

Heavy-duty C-frame construction robust design is built to last

High-precision roll placement with electric actuator

Patented Dish-O-Matic II system saw tensioning & leveling on one machine without flipping the saw

Manual or hydraulic roll pressure reduces heavy saw hammering

Drum switch roll actuation for simple operation

Dish-O-Matic II roll system

- For precise tensioning and leveling on one machine. The DOM II roll system allows the filer to tension and level the saw with one machine.
- Off-set roll diameter for unobstructed tensioning.

NO NEED TO FLIP THE SAW WITH THE DOM II STRETCHER!





Electric actuator for cross saw roll movement

Easily change rolling position for precise tensioning.



Both top and bottom rolls are driven

Ensures band saw properly feeds through roll system.



Options

- Hydraulic roll pressure
- → Variable speed rolls
- Motor brake
- Round saw attachment
- □ Digital pressure gauge



Models

#10E	Tensioning up to 10" wide bands
#10 DOM2	Tensioning and leveling up to 10" wide bands
#17E	Tensioning up to 17" wide bands
#17 DOM2	Tensioning and leveling up to 17" wide bands

#17

3kVA

<u>Up to 17"(432mm)</u> **Up to 1/4" (6.35mm) thick**

6" (150mm) 400kg 882lb 400 Vac, 3 Ph, 50Hz

Specifications

	#10
Band saw capacity	Up to 10" (254mm)
Plate thickness	Up to 1/4" (6.35mm) thick
Dimensions	H:18" (457mm) L:36"(914mm) W:30" (762mm)
Standard roll radius	6" (150mm)
Shipping weight	325kg 717lb
Voltage	480Vac, 3 Ph, 60Hz,
Power	3kVA

Williams and White reserves the right to alter or amend specifications without prior notice

H:18" (457mm) x L:48"(1,219mm) x W:30"(762mm)